


# LUNER Ø400mm

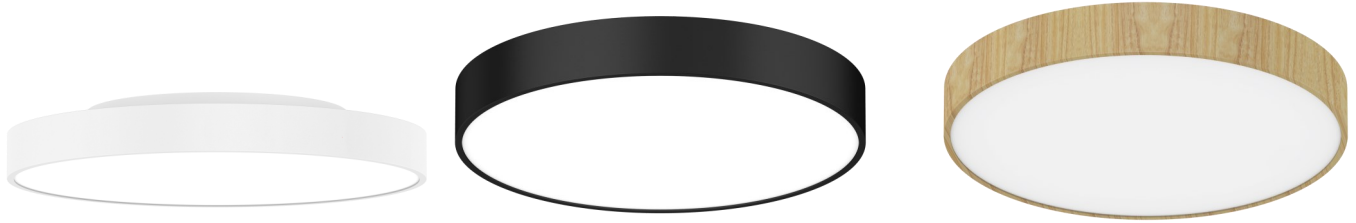

## Performance

Lumen Output	Wattage	lm/cW
2050lm	18W	113.88

## Emergency (Optional)

BLF	Lumen Output
12%	246lm

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Kelvin	3000K - 4000K
Colour Of Body	Black - White - Wood grain
Diffuser	Microprism
Direct - Indirect	88% Down 12% Up
UGR	<18
Dimming Type	DALI
Operating Temperature	-25... +60 °C
Longevity (L80/B10)	60,000 hours
Colour Rendering (3 SDCM)	Ra>82 Ra>90
IP Rating	IP40
Dimensions	Ø400 x 85mm
Weight	2.6 kg
Warranty	5 Years
Certification	CE, ROHS

Emergency Type	DALI Reporting
Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS



**54** lighting

Tel: 01342 395625 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk  
 Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW