

# METRO



## Performance


Lumen Output	Wattage	lm/cw
1510lm	14.9W	101.34
2110lm	19.6W	107.65

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	12 A
UGR	< 10
Dimming Type (Optional)	DALI
Operating Temperature	-25 +60 °C
Longevity (L70/B10)	60,000 hours
Colour Rendering	Ra>90
IP Rating	IP54
Cutout	Ø95mm
Dimensions	Ø108 x 85mm
Weight	1.2 kg
Warranty	5 Years
Certification	CE, ROHS

## Emergency (Optional)

BLF	Lumen Output
20%	302lm
15%	316.5lm

Emergency Duration	3 Hours - Dali
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS

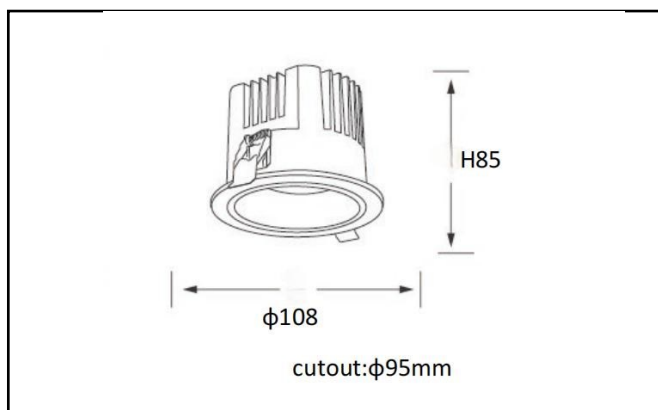

**54** lighting

Tel: 01342 395625 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk

Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW