


MARTIN Ø302/ 352mm

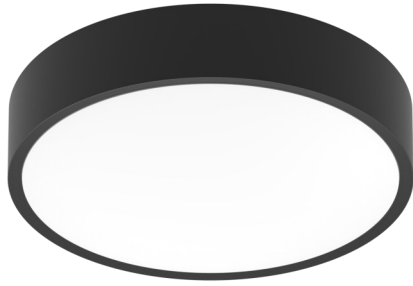

Performance


| Lumen Output | Wattage | lm/cW |
|-------------------|---------|--------|
| 1980lm (Ø302mm) | 16W | 123.75 |
| 2780lm (Ø352mm) | 21W | 132.38 |

Emergency (Optional)

| BLF | Lumen Output |
|-----|--------------|
| 22% | 435lm |
| 16% | 445lm |

| | |
|----------------------------------|----------------|
| Rated Supply Voltage | 220—240 V |
| AC Voltage Range | 198—264 V |
| Mains Frequency | 50/60 Hz |
| Output LF Current Ripple @ 120Hz | <5% |
| Overvoltage Protection | 320 V |
| In-rush Current | 5 A |
| THD | <10% |
| Dimming Type | DALI2 |
| Kelvin | 3000K 4000K |
| Operating Temperature | -10 + 50 °C |
| Longevity (L80/B10) | 60,000 hours |
| Colour Rendering (3 SDCM) | Ra>82 |
| IP Rating | IP65 |
| IK Rating | IK10 |
| Dimensions | Ø302 x 67.5mm |
| Dimensions | Ø352 x 67.5mm |
| Warranty | 5 Years |
| Certification | CE, ROHS, UKCA |

| | |
|-----------------------|----------------------------------|
| Emergency Type | DALI2 Reporting |
| Emergency Duration | 3 Hours |
| Recharge Period | 24 Hours |
| Battery Type | LiFePO4 (Lithium Iron Phosphate) |
| Battery Pack | 3 x 3.2V 1.5Ah |
| Parasitic Load | 1.2W |
| Operating Temperature | -10 + 50 °C |
| Power Efficiency | 95% |
| Certification | CE, ROHS, UKCA |

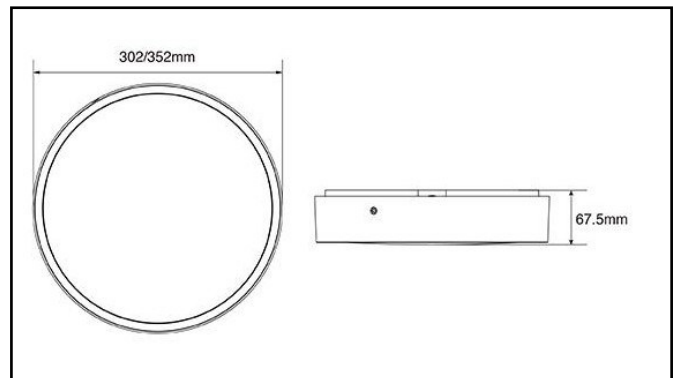

54 lighting

Tel: 01883 339685 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW